1985 Apr 2 | FINGERPRINTING. 176

There must be a better way of fingerprinting than the application of black stuff to the fingers. A neat, clean, quick method is required. Possibly something based on a gel/mucus covered tape.

REINFORCED GLASS 1985-3-21

There must be some extensive application of glass reinforced with a second phase apart from conventional wires. These could include glass fibres and paper fibres. Products should be relatively cheap and have a range of properties, e.g. flexibility, impact resistance, etc.

BOOKBINDING AGAIN 1985-3-21

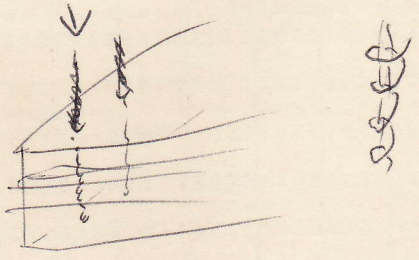

Use fine {or tap-die} corkscrew / (as low width) to drill helical hole (or screw-thread hole) through paper stock, repeat with glue-laden similar drill, then squash paper stack flat so that displaced paper is restored to level. Drill from both ends to get plugs of glue/paper running both ways from each sheet